


Installation manuelle du client GECAMed

Si vous rencontrez un problème lors du lancement du Java WebStart, voici une solution pour éviter de démarrer GECAMed via le Java Web Start. Il s'agit d'installer manuellement le logiciel client GECAMed sur l'ordinateur client.

Instructions:

- **Ouvrir votre navigateur internet** et saisir l'adresse suivante: <http://localhost:8080/gecamed>
- Si le serveur de GECAMed est installé sur une autre machine, remplacer "localhost" avec l'adresse IP du serveur : http://IP_OF_YOUR_SERVER:8080/gecamed
- **Descendre tout en bas** de la page jusqu'à: **Installing the GECAMed client manually**
- **Télécharger** le fichier GECAMedClient.zip
- **Dézipper** le fichier dans un répertoire (**clic droit -Tout extraire**)
- **Démarrer le client GECAMed** avec le script correspondant à votre système d'exploitation startGECAMedClientOnWindows.bat pour Windows ou startGECAMedClientOnMac.command pour Mac OSX.
- Un raccourci pour le bureau est également créé.

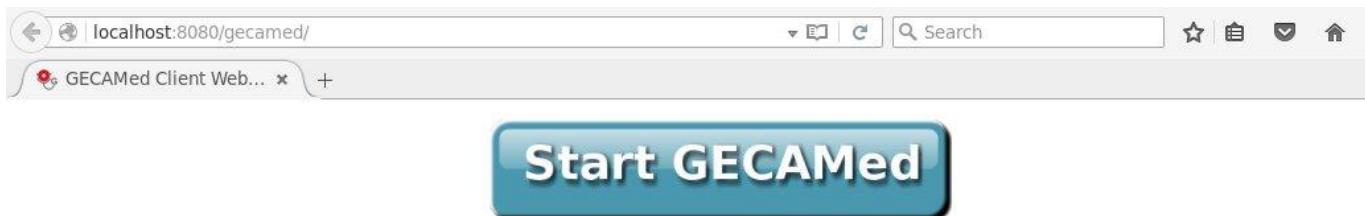

If you start GECAMed for the first time, both username and password are **admin**. With this admin user account you can do the basic GECAMed configuration tasks, like creating an office, physicians, and more users. The "Obligatory Settings" article from the User Manual ([DE](#), [FR](#)) pops up to guide you through the process.

Once you're done with the basic configuration we strongly advise you to change the password of the admin user. You might need it in the future for other customizations.

Known Problems with Java Webstart

If the GECAMed client is not starting, there might be something wrong with your Java installation. Try to reinstall Java.

If the Browser asks you to download or open the GECAMed.jnlp file, choose "javaws" from your Java installation directory to open the file, e.g. "C:\Program Files\Java\jre7\bin\javaws" on Windows. On Mac OSX and Linux the command "which javaws" helps to localize the file.

Installing the GECAMed client manually

Recently there has been a new problem when using Java Webstart on Mac OSX (see [ticket #1433](#) for more details). Until we have found and corrected the root cause of the problem, here is a workaround that avoids Java Webstart entirely. The principal idea is to install the GECAMed client software manually on the client computer. Of course, the advantages of Java Webstart mentioned above are lost.

To do so, proceed as follows:

1. **Download GECAMedClient.zip**
2. Unzip the file into a directory of your choice, unless your browser hasn't already done this for you.
3. Start the GECAMed client with the script corresponding to your OS (**startGECAMedClientOnWindows.bat** for Windows, respectively **startGECAMedClientOnMac.command** on Mac OSX).
4. A desktop shortcut for quick launch is also provided.

From:

<https://gecamed.lu/> - **GECAMed - Gestion de Cabinets Médicaux**



Permanent link:

https://gecamed.lu/fr/faq/general/client_installation

Last update: **2019/12/09 11:19**